

OPUS HE 24-7.5 R12U F
 OPUS HE 48 - 10.0 R12U F
 OPUS HE 48 - 10.0 R12U P
 OPUS HE 60 - 10.0 R12U F
 OPUS HE 60 - 10.0 R12U P
 OPUS HE 110 - 10.0 R12U F
 OPUS HE 125 - 10.0 R12U F
 OPUS HE 220 - 10.0 R12U F



Product Description

OPUS HE power systems are robust, free convection cooled, N+1 redundant backup power solutions for critical infrastructure applications such as transmission and distribution substations, process industries, railway signalling and substations and telecommunications.

OPUS HE DC power systems consist of MHE rectifiers, VID+ controllers, Connections for mains and battery and load distribution MCB. System is configurable to match with requirements of the application.

19" 12U Rack delivers maximum 10 kW output power at 48, 60, 110, 125 and 220 VDC and 7.5 kW at 24 VDC output. 19" 12U Racks include slots for maximum 5 rectifier modules. Load distribution configuration of MCB quantity and current ratings can be configured per order. Wall mounting, IP21 cover kit, temperature sensor, battery block voltage monitoring and BLVD are options.

Features



- ◆ Efficiency up to 97%
- ◆ Convection cooling – no fans
- ◆ Outputs 24, 48, 60, 110, 125, 220 VDC
- ◆ 10.0 kW output power, 24VDC 7.5kW
- ◆ Configurable load distribution
- ◆ VID+ I/O controller with remote and local user interfaces
- ◆ Flexible design with full front cabling
- ◆ Options: Wall mounting and IP21 kit, BLVD contactor, battery block voltage monitoring
- ◆ Safety:
 - Rack: EN61439-1, EN61439-2
 - Low voltage switchgear controlgear assemblies
 - Rectifiers: EN 62368-1, EN 50124-1 rail
- ◆ EMC:
 - Rack: EN61439-1, EN61439-2
 - Rectifiers: EN 61000-6-1 / -2 / -3 / -4 / -5
 - EN 50121-4 rail, ETSI EN 300386 (48/60V)

Technical Specifications

General construction	
Cooling	Natural convection
Protection	IP 20, Option IP21
Controller user interface	Display and local control in front panel
Connections	Behind front panel
Colour	Frame RAL 7024
Dimensions & weight	Height 12U (533 mm) Width 19" (482 mm) Depth 395 mm Weight 20 kg w/o rectifiers



Environment and standards	
Temp. range	-25 ... +60 C, see derating, Start-up at -40 C
Humidity max	95% relative humidity, non-condensing
Altitude	Max 3km, full power up to 2km above sea level Derating 1% per 100 m between 2-3km
Safety	Rack: EN61439-1, EN61439-2 Rectifiers: EN 62368-1, EN 50124-1 rail
EMC	Rack: EN61439-1, EN61439-2 Rectifiers: EN61000-6-1 / -2 / -3 / -4 Generic EN61000-6-5 Utility EN 50121-4 Rail, ETSI EN 300 386 (48/60V)

AC Input	OPUS HE 24-7.5 R12U F	OPUS HE 48-10.0 R12U F/P	OPUS HE 60-10.0 R12U F/P	OPUS HE 110-10.0 R12U F	OPUS HE 125-10.0 R12U F	OPUS HE 220-10.0 R12U F
AC connection	TN-S system, 3W + N + PE, (3-phases, neutral and protective earth wires)					
Nominal input	100-250 VAC / 3 x 173-433 VAC (TN-S system) Options: 1-phase supply 100/250VAC, 3-phase Delta/IT supply 3 x 173/250VAC					
Input range	Full range: 85 – 300 VAC / 3 x 147–528 VAC *) Rated full power range: 180– 275 VAC / 3 x 312–476 VAC (TN-S system) *) Reduced output power 85-180VAC, linear derating, 1200W @ 120 VAC per rectifier *) Temporary high voltage range 275-300VAC, continuous supply voltage above 275VAC not recommended					
Input frequency	Rated 45 - 66 Hz, reduced power at 35 - 45 Hz. Shut down at 35 Hz					
Phase current, V _{in} 180 V	Max 18 A	Max 24 A				
Main Switch	63A, 4-pole (L1-L2-L3-N)					
Recommended mains fuse	3 x 25 A (TN-S system)					
Rectifier input protection	MCB C16A / rectifier module					

DC Output	OPUS HE 24-7.5 R12U F	OPUS HE 48-10.0 R12U F/P	OPUS HE 60-10.0 R12U F/P	OPUS HE 110-10.0 R12U F	OPUS HE 125-10.0 R12U F	OPUS HE 220-10.0 R12U F
Grounding	2-pole, floating	1-pole, + grounded or 2-p floating		2-pole, floating		
Nominal voltage	24 VDC	48 VDC	60 VDC	110 VDC	125 VDC	220 VDC
Voltage factory setting	27.24 VDC	54.48 VDC	68.10 VDC	122.58 VDC	136.20 VDC	245.16 VDC
Voltage range	21-33 VDC	42-59 VDC	51-72 VDC	90-150 VDC	100-160 VDC	178-280 VDC
Quantity of rectifiers	Max 5 pcs					
Max current	312.5A @ 24V	208.5A @ 48V	166.7A @ 60V	92.5A @ 108V	83.3A @ 120V	46.3A @ 216V
Max Power	Max 7.5kW *)	Max 10kW	Max 10kW	Max 10kW	Max 10kW	Max 10kW
Rectifier output protection	MCB C63A	MCB C50A	MCB C40A	MCB C20A	MCB C20A	MCB C10A

*) Battery MCB 250A, max battery current 250A

Derating curves

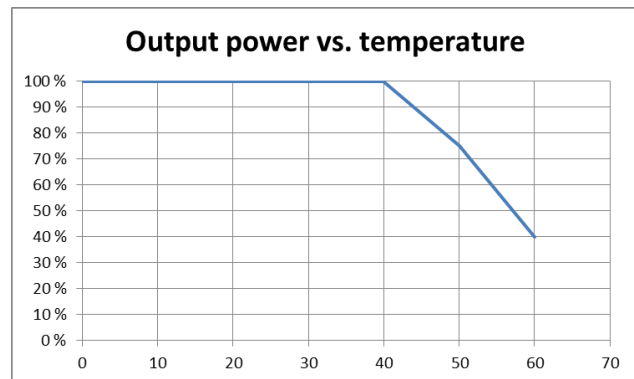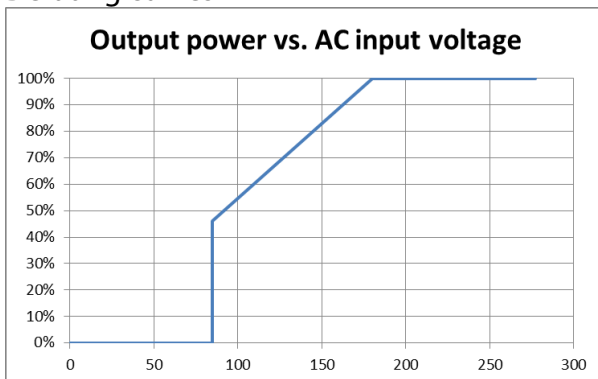


Battery connection	OPUS HE 24-7.5 R12U F	OPUS HE 48-10.0 R12U F/P	OPUS HE 60-10.0 R12U F/P	OPUS HE 110-10.0 R12U F	OPUS HE 125-10.0 R12U F	OPUS HE 220-10.0 R12U F
Protective device	MCB D250A 2- pole	MCB D250A 2- pole	MCB D200A 2- pole	MCB D100A 2- pole	MCB D100A 2- pole	MCB D50A 2- pole


Load distribution	OPUS HE 24-7.5 R12U F	OPUS HE 48-10.0 R12U F/P	OPUS HE 60-10.0 R12U F/P	OPUS HE 110-10.0 R12U F	OPUS HE 125-10.0 R12U F	OPUS HE 220-10.0 R12U F
Protective device	Max 5 x MCB, 2 A to 63 A, 2-p MCB + aux	Max 10 x MCB, 2A to 63A, 1-pole MCB + aux contact		Max 5 x MCB, 2A to 63A, 2-pole MCB + aux contact		


Connection terminals	
Mains terminal	Q1 Main switch terminal blocks 10 mm ² , L1-L2-L3-N-PE
DC output	MCB screw terminals, 1.5mm ² ... 25 mm ² flexible cable, 1.5mm ² ... 35 mm ² rigid cable
Battery	MCB screw terminals, 1.5...35 mm ² flexible cable, 1...50 mm ² rigid cable
Alarms, Inputs	Configurable relay alarms 4 pcs (option up to 12), Spring terminals 0.75mm ² ... 1.5mm ² cable Configurable alarm/temp. inputs 4 pcs (option up to 12), Spring terminals 0.75mm ² ... 1.5mm ² cable

Block Diagram, 2-pole floating systems

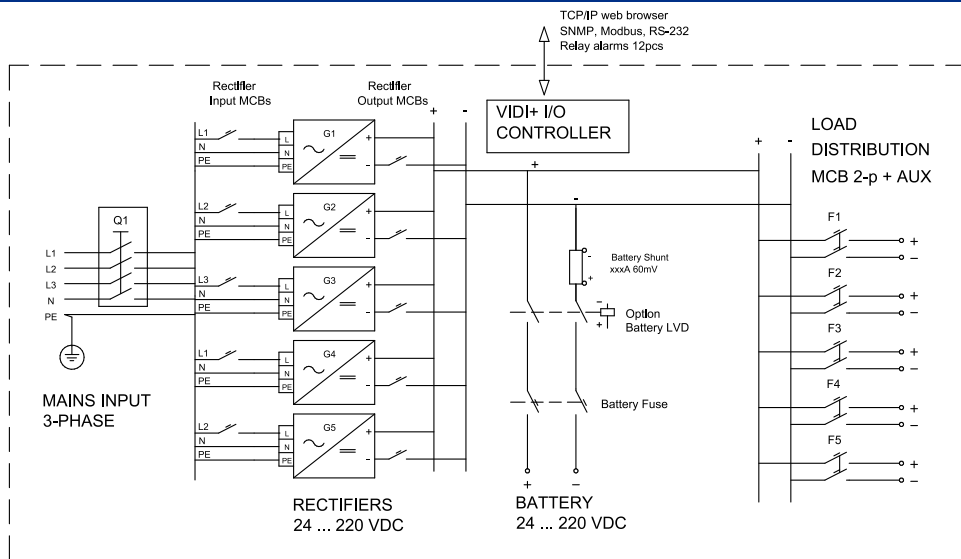


Block Diagram, 1-pole systems, positive pole grounded, option negative pole grounded

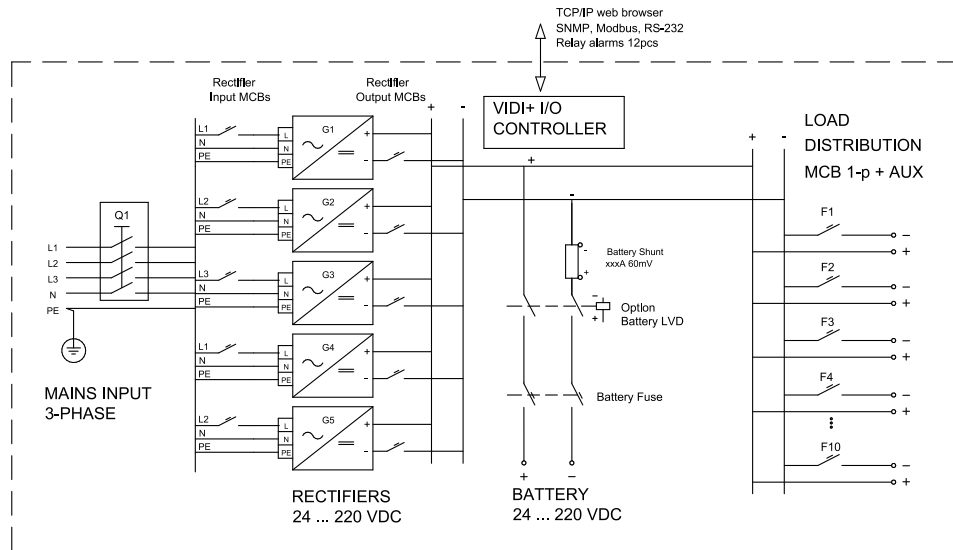

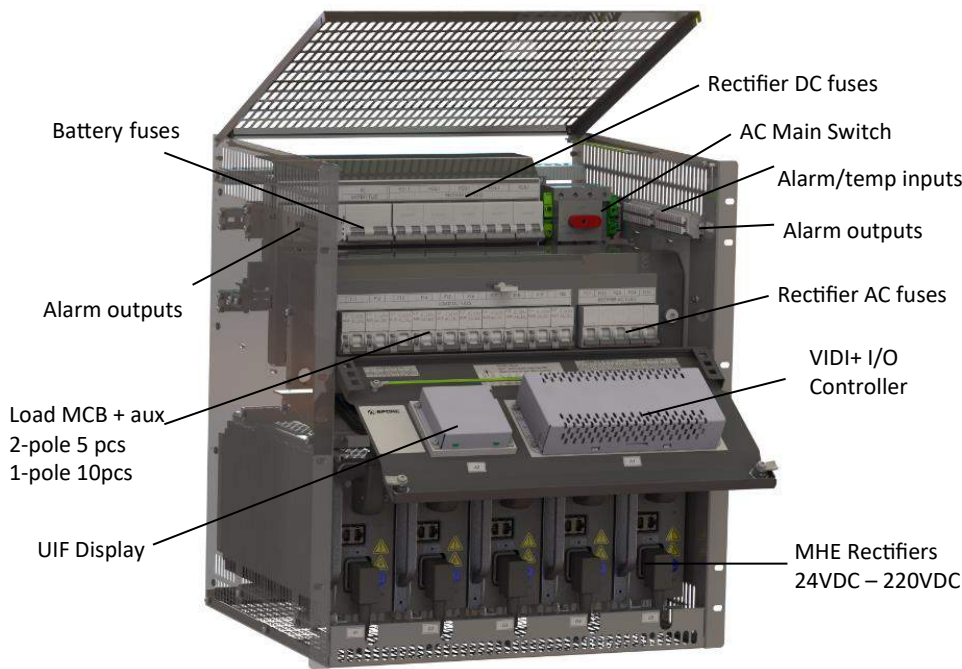

Option:
 Modular UPS rack 19" 12U
 3 x Rectifier
 2 x Inverter
 Bypass & Manual bypass

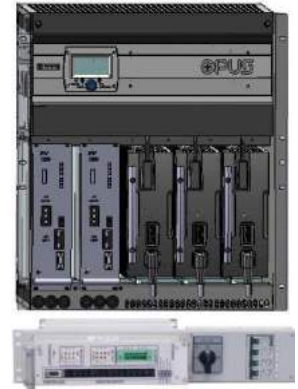

Order Information

Systems, Description	Order number	Voltage / Current
OPUS HE 24-7.5 R12U F	9220X0015094	24VDC / 62.5A – 312.5A
OPUS HE 48-10.0 R12U F	9220X0015102	48VDC / 41.7A – 208.5A
OPUS HE 48-10.0 R12U P	9220X0015095	48VDC / 41.7A – 208.5A
OPUS HE 60-10.0 R12U F	9220X0015103	60VDC / 33.3A – 166.7A
OPUS HE 60-10.0 R12U P	9220X0015096	60VDC / 33.3A – 166.7A
OPUS HE 110-10.0 R12U F	9220X0015097	110V / 18.5A – 92.5A
OPUS HE 125-10.0 R12U F	9220X0015098	125V / 16.7A – 83.3A
OPUS HE 220-10.0 R12U F	9220X0015099	220V / 9,3A – 46,3A

Rectifiers	Order number
MHE24-1500	92I280
MHE48-2000	92I160
MHE48-2000	92I160
MHE60-2000	92I290
MHE60-2000	92I290
MHE110-2000	92I250
MHE125-2000	92I260
MHE220-2000	92I270

Controllers, Description	Order number
VIDI+ I/O System controller	94G910

Options, Description	Order number
VIDI-BM Block voltage monitoring	9040X0002338

Options, Description	Order number
Temperature Sensor	94M268
Wall mounting and IP21 kit	8320X0002080

Options, Description	Order number
BLVD for 24 VDC 12U racks	
BLVD for 48/60 VDC 12U racks	8160X0011789
BLVD for 110/125 VDC 12U racks	

2-pole MCB	Order number
C2A 2-p, Schneider C60H-DC	5540X0009012
C4A 2-p, Schneider C60H-DC	5540X0009014
C6A 2-p, Schneider C60H-DC	5540X0009016
C10A 2-p, Schneider C60H-DC	5540X0009017
C16A 2-p, Schneider C60H-DC	5540X0009020
C20A 2-p, Schneider C60H-DC	5540X0009021
C25A 2-p, Schneider C60H-DC	5540X0009023
C32A 2-p, Schneider C60H-DC	5540X0009025
C40A 2-p, Schneider C60H-DC	5540X0009026
C50A 2-p, Schneider C60H-DC	5540X0009027
C63A 2-p, Schneider C60H-DC	5540X0009028

1-pole MCB	Order number
C2A 1-p, Schneider iC60N	5540X0009683
C4A 1-p, Schneider iC60N	5540X0009684
C6A 1-p, Schneider iC60N	5540X0009685
C10A 1-p, Schneider iC60N	5540X0009686
C16A 1-p, Schneider iC60N	5540X0009687
C20A 1-p, Schneider iC60N	5540X0009688
C25A 1-p, Schneider iC60N	5540X0009689
C32A 1-p, Schneider iC60N	5540X0009690
C40A 1-p, Schneider iC60N	5540X0009691
C50A 1-p, Schneider iC60N	5540X0009692
C63A 1-p, Schneider iC60N	5540X0009693

Fuse monitoring	Order number
Auxiliary contact, C60H-DC series	5760X0008930

Fuse monitoring	Order number
Auxiliary contact, iC60N series	5760X0009731