


UFED20W SERIES

DC/DC Converter Single & Dual Output: 20 Watts

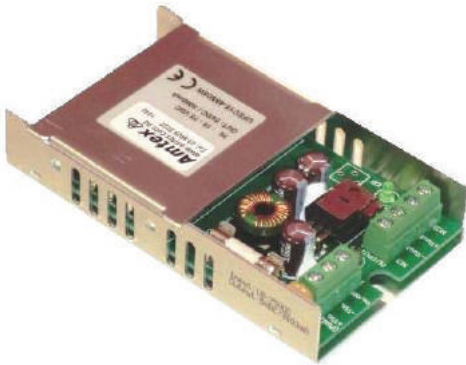

Features

- 4:1 wide Input range: 9.5~ 36V & 18~75V
- High quality Panel mount assembly
- Single & Dual outputs
- High efficiency up to 87%
- Regulated output & Short circuit protection
- 1600V isolation
- High operating temperature up to +85°C
- Zero load operation
- Designed to EN60950, UL1950
- EMC Compliant
- Input In-rush current limit & Transient Protection
- Voltage output trim- singles
- Option. DIN Rail mounting - "DR" to model
- Option. Fully enclosed case - "EC" to model

Model Number	Input Range VDC	Output Voltage VDC	Output Current @Full Load mA	Input Current @ No Load mA	Efficiency %	Maximum Capacitor Load (1) uF
UFED20-24S3P3W	9.5 ~ 36	3.3	5500	51	84	18000
UFED20-24S05W	9.5 ~ 36	5	4000	66	87	9600
UFED20-24S12W	9.5 ~ 36	12	1670	25	85	1650
UFED20-24S15W	9.5 ~ 36	15	1330	26	85	1050
UFED20-24D05W	9.5 ~ 36	±5	±2000	58	87	±4800
UFED20-24D12W	9.5 ~ 36	±12	±833	33	86	±825
UFED20-24D15W	9.5 ~ 36	±15	±667	34	86	±525
UFED20-48S3P3W	18 ~ 75	3.3	5500	36	84	18000
UFED20-48S05W	18 ~ 75	5	4000	36	87	9600
UFED20-48S12W	18 ~ 75	12	1670	17	86	1650
UFED20-48S15W	18 ~ 75	15	1330	17	86	1050
UFED20-48D05W	18 ~ 75	±5	±2000	36	88	±4800
UFED20-48D12W	18 ~ 75	±12	±833	19	87	±825
UFED20-48D15W	18 ~ 75	±15	±667	19	87	±525

PART NUMBER STRUCTURE

UFED20 -	48	S	05	W -	N	EC
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)	Input Range	Remote Control Option	Assembly Option
	24: 9.5~36 48: 18~75	S: Single D: Dual	3P3: 3.3 05: 5 12: 12 15: 15 05: ±5 12: ±12 15: ±15	4:1	□: Positive logic N: Negative logic	□: No Assembly Option EC: Enclosed Mounting Type DR: Din Rail Mounting Type ED: Enclosed & Din Rail Mounting Type

UFED20W SERIES

DC/DC Converter Single & Dual Output: 20 Watts

INPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Operating input voltage range	24Vin(nom)		9.5	24	36	VDC
	48Vin(nom)		18	48	75	
Input fuse (slow blow)	24Vin(nom)			6		A
	48Vin(nom)			4		
In-rush current				15		A
Input reflected ripple current	Nominal input and Full load			10		mAp-p
Start up voltage	24Vin(nom)				9.5	VDC
	48Vin(nom)				18	
Shutdown voltage	24Vin(nom)			7.5		VDC
	48Vin(nom)			15		
Start up time	Constant resistive load	Power up		100		ms
Input surge voltage	100ms, max.	24Vin(nom)			50	VDC
		48Vin(nom)			100	
Remote ON/OFF	Referred to -Vin pin	Positive logic (Standard)	DC-DC ON		Open or 3 ~ 12VDC	
			DC-DC OFF		Short or 0 ~ 1.2VDC	
		Negative logic (Option)	DC-DC ON		Short or 0 ~ 1.2VDC	
			DC-DC OFF		Open or 3 ~ 12VDC	
		Input current of Ctrl pin		-0.5		0.5
		Remote off input current		2.5		mA

OUTPUT SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Voltage accuracy	3.3Vout		-1.5		+1.5	%
	Others		-1.0		+1.0	
Line regulation	Low Line to High Line at Full Load	Single	-0.2		+0.2	%
		Dual	-0.5		+0.5	
Load regulation	No Load to Full Load	3.3Vout	-1.5		+1.5	%
		Others	-1.0		+1.0	
Cross regulation	Asymmetrical load 25%/100% FL	Dual	-5.0		+5.0	%
Voltage adjustability	Single output		-10		+10	%
Ripple and noise	Measured by 20MHz bandwidth	Single		60		mVp-p
			3.3Vout, 5Vout, 12Vout, 15Vout	75		
		Dual		100		
Temperature coefficient			-0.02		+0.02	%/°C
Transient response recovery time	25% load step change			250		µs
Over voltage protection	Zener diode clamp	3.3Vout		3.9		VDC
		5Vout		6.2		
		12Vout		15		
		15Vout		18		
Output indicator				Green LED		
Over load protection	% of lout rated			150		%
Short circuit protection				Continuous, automatic recovery		

GENERAL SPECIFICATIONS

Parameter	Conditions		Min.	Typ.	Max.	Unit
Isolation voltage	1 minute	Input to Output	1600			VDC
		Input (Output) to Chassis	1600			
Isolation resistance	500VDC		1			GΩ
Isolation capacitance					4000	pF
Switching frequency			360	400	440	kHz
Safety meets						UL60950-1 EN60950-1 IEC60950-1
Chassis material						Aluminum
Weight						89g (3.13oz)
MTBF	MIL-HDBK-217F, Full load					1.966 x 10 ⁶ hrs

UFED20W SERIES

DC/DC Converter Single & Dual Output: 20 Watts

ENVIRONMENTAL SPECIFICATIONS

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+75	°C
	With derating	+75		+91	
Storage temperature range		-40		+105	°C
Thermal shock					MIL-STD-810F
Vibration					MIL-STD-810F
Relative humidity					5% to 95% RH


EMC SPECIFICATIONS

Parameter	Conditions	Level
EMI	EN55022	Class B
ESD	EN61000-4-2 Air ± 8kV and Contact ± 6kV	Perf. Criteria A
Radiated immunity	EN61000-4-3 10V/m	Perf. Criteria A
Fast transient	EN61000-4-4 ± 2kV	Perf. Criteria A
Surge	EN61000-4-5 ± 0.5kV	Perf. Criteria A
Conducted immunity	EN61000-4-6 10Vr.m.s	Perf. Criteria A


Note:

1. Test by minimum input and constant resistive load.


CHARACTERISTIC CURVES

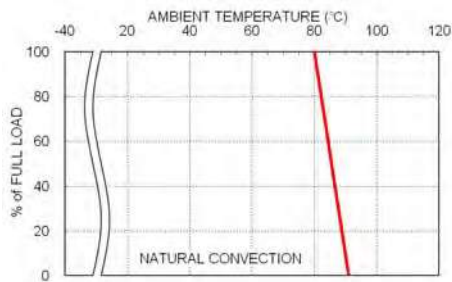

UFED20-48S05W Derating Curve

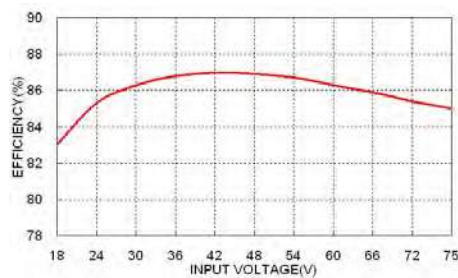

UFED20-48S05W Efficiency vs. Input Voltage

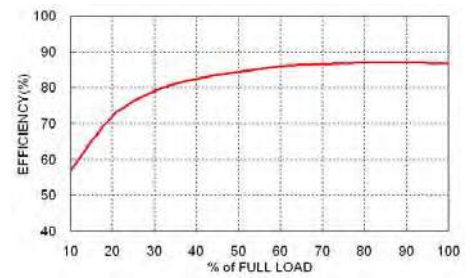


UFED20-48S05W Efficiency vs. Output Load

UFED20W SERIES

DC/DC Converter Single & Dual Output: 20 Watts

MECHANICAL DRAWING

CHASSIS MOUNTING TYPE - STD

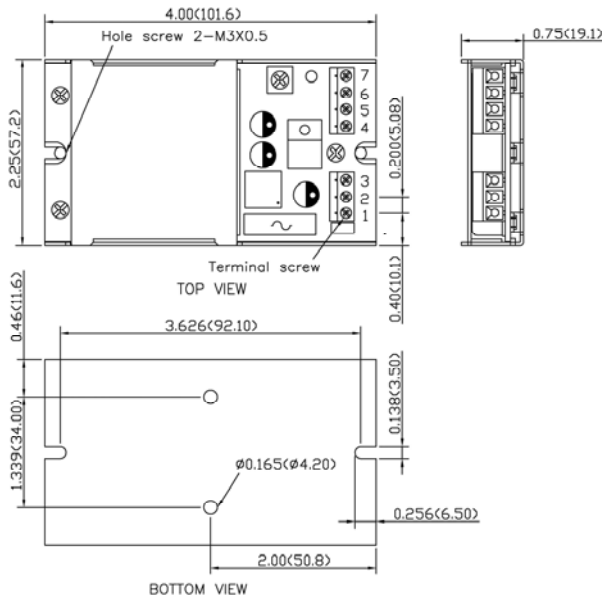

PIN CONNECTION


PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	Ctrl	Ctrl
4	NC	NC
5	-Vout	-Vout
6	+Vout	Common
7	NC	+Vout

* NC : No Connection

* Screw terminals – wire range from 14 to 18 AWG

1. All dimensions in Inch (mm)
2. Tolerance : X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
3. Hole screw locked torque :
MAX 5.0kgf-cm (0.49N-m)
4. Terminal screw locked torque :
MAX 2.5kgf-cm (0.25N-m)

ENCLOSED MOUNTING TYPE: (OPTION -EC)

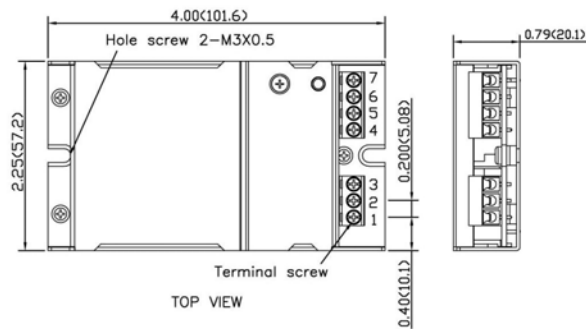

DIN RAIL MOUNTING TYPE: (OPTION -DR)

