

IW SERIES

DC/DC Single & Dual Output: 1 Watt



Specification

Input

- Input Voltage Range • See table
- Input Reflected Ripple Current • 35 mA pk-pk through 12 μ H inductor, 5 Hz to 20 MHz
- Input Reverse Voltage Protection • None
- Input Filter • Capacitor
- Input Surge • 5 V models: 12 VDC for 100 ms
12 V models: 24 VDC for 100 ms
24 V models: 40 VDC for 100 ms
48 V models: 80 VDC for 100 ms

Output

- Output Voltage • See table
- Minimum Load • None ⁽⁸⁾
- Line Regulation • $\pm 0.5\%$ max
- Load Regulation • $\pm 1.0\%$ max from 25-100% load ⁽⁷⁾
- Setpoint Accuracy • $\pm 2\%$ max
- Ripple & Noise • 80 mV pk-pk max, 20 MHz bandwidth ⁽⁶⁾
- Short Circuit Protection • Continuous with auto recovery (foldback)
- Cross Regulation • $\pm 5\%$ on dual output models
- Remote On/Off • Optional on SIP package model ⁽⁴⁾
- Temperature Coefficient • 0.02%/ $^{\circ}$ C

General

- Efficiency • See table
- Isolation Voltage • 1000 VDC (optional 3000 VDC)
- Isolation Resistance • $10^9 \Omega$
- Isolation Capacitance • 60 pF
- Switching Frequency • 100-650 kHz
- MTBF • > 1.66 Mhrs to MIL-HDBK-217F at 25 $^{\circ}$ C, GB

Environmental

- Operating Temperature • -40 $^{\circ}$ C to +100 $^{\circ}$ C, derate from 100% load at 85 $^{\circ}$ C to 0% load at 100 $^{\circ}$ C
- Storage Temperature • -40 $^{\circ}$ C to +125 $^{\circ}$ C
- Case Temperature • 100 $^{\circ}$ C max
- Cooling • Convection cooled

Notes


- For dual inline package replace 'S' in model number with 'D'.
- For optional 3 kV isolation add suffix '-H' to the model number.
- For dual output delete suffix 'A' & split output current equally between rails.
- For optional Remote On/Off SIP models, add suffix '-R' to model number. Applying 5 V via 1 k Ω current limiting resistor and diode turns output off.
- For optional metal case, add suffix '-M' to model number, contact sales for details.
- Output capacitor of 100 μ F required to meet quoted ripple & noise.
- Minimum load of 25% required to meet quoted specifications.
- Operation at no load will not damage the converter but it may not meet all specifications.
- Pin pitch tolerance: ± 0.014 (± 0.35), Case tolerance: ± 0.02 (± 0.5)
- Weight: SIP 0.009 lbs (4.0 g), DIP 0.013 lbs (6.0 g)
Metal case weight: SIP 0.014 lbs (6.5 g), DIP 0.017 lbs (8.0 g)

Features

- Regulated Single & Dual Output
- Wide 2:1 Input Range
- SIP or DIP Package
- 1000 VDC Isolation (Optional 3000 VDC)
- Continuous Short Circuit Protection
- Optional Metal Case


Input Voltage	No Load Input Current	Output Voltage ⁽³⁾	Output Current	Max. Capacitive Load	Efficiency	Model Number ⁽¹⁻⁵⁾
4.5-9.0 V	15 mA	3.3 V	303 mA	3300 μ F	67%	IW0503SA \uparrow A
	15 mA	5.0 V	200 mA	3300 μ F	67%	IW0505SA \uparrow A
	40 mA	9.0 V	111 mA	470 μ F	70%	IW0509SA \uparrow A
	55 mA	12.0 V	83 mA	470 μ F	70%	IW0512SA \uparrow A
	55 mA	15.0 V	67 mA	470 μ F	70%	IW0515SA \uparrow A
9.0-18.0 V	70 mA	24.0 V	42 mA	220 μ F	68%	IW0524SA \uparrow A
	15 mA	3.3 V	303 mA	3300 μ F	70%	IW1203SA \uparrow A
	15 mA	5.0 V	200 mA	3300 μ F	72%	IW1205SA \uparrow A
	15 mA	9.0 V	111 mA	470 μ F	77%	IW1209SA \uparrow A
	15 mA	12.0 V	83 mA	470 μ F	77%	IW1212SA \uparrow A
18.0-36.0 V	15 mA	15.0 V	67 mA	470 μ F	77%	IW1215SA \uparrow A
	15 mA	24.0 V	42 mA	220 μ F	73%	IW1224SA \uparrow A
	8 mA	3.3 V	303 mA	3300 μ F	70%	IW2403SA \uparrow A
	8 mA	5.0 V	200 mA	3300 μ F	72%	IW2405SA \uparrow A
	8 mA	9.0 V	111 mA	470 μ F	75%	IW2409SA \uparrow A
36.0-72.0 V	8 mA	12.0 V	83 mA	470 μ F	75%	IW2412SA \uparrow A
	8 mA	15.0 V	67 mA	470 μ F	75%	IW2415SA \uparrow A
	8 mA	24.0 V	42 mA	220 μ F	75%	IW2424SA \uparrow A
	6 mA	3.3 V	303 mA	3300 μ F	66%	IW4803SA
	6 mA	5.0 V	200 mA	3300 μ F	68%	IW4805SA
	6 mA	9.0 V	111 mA	470 μ F	70%	IW4809SA
	6 mA	12.0 V	83 mA	470 μ F	70%	IW4812SA
	6 mA	15.0 V	67 mA	470 μ F	70%	IW4815SA
	6 mA	24.0 V	42 mA	220 μ F	68%	IW4824SA

Mechanical Details

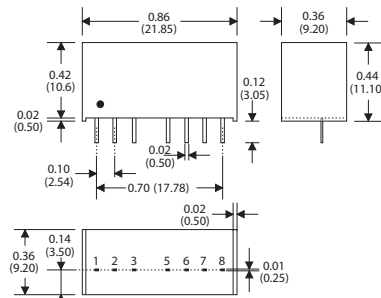

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	+V Input	+V Input
3	Opt. ROF*	Opt. ROF**
5	N.P. / N.C.	N.C.
6	+V Output	+V Output
7	-V Output	-V Output
8	NC	Common

*When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Pin.

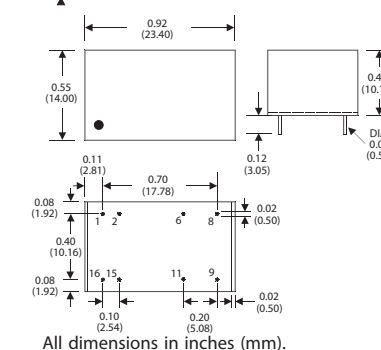

**When optional ROF is present pin 5 is No Connection. When not present pin 3 & 5 are No Connection.

PIN CONNECTIONS		
Pin	Single	Dual
1	-V Input	-V Input
2	-V Input	-V Input
6	NC	Common
8	NC	-V Output
9	+V Output	+V Output
11	-V Output	Common
15	+V Input	+V Input
16	+V Input	+V Input