

# JTL30 SERIES

DC/DC Single & Dual Output: 30 Watts



## Specification

### Input

Input Voltage Range	• 24 V (9-36 VDC), 48 V (18-75 VDC)
Input Current	• See table
Input Reflected Ripple	• 20 mA pk-pk through 12 $\mu$ H inductor
Input Filter	• Pi network
Undervoltage Lockout	• 24 V models: ON 8.6 V, OFF 7.9 V typical 48 V models: ON 17.8 V, OFF 16 V typical
Input Surge	• 24 V models 50 VDC for 100 ms 48 V models 100 VDC for 100 ms

### Output

Output Voltage	• See table
Output Voltage Trim	• $\pm 10\%$ on single outputs models only
Minimum Load	• No minimum load required for single and dual output models, 10% required on all outputs for triple output models
Line Regulation	• $\pm 0.2\%$ max for single and dual output models, $\pm 1.0\%$ main, $\pm 5\%$ auxiliary for triple output models
Load Regulation	• Single output models: $\pm 0.5\%$ max Dual output models: $\pm 1\%$ max balanced outputs Triple output models: $\pm 1\%$ max main, $\pm 5\%$ auxiliaries
Cross Regulation	• $\pm 5\%$ for dual and triples output (see note 2)
Setpoint Accuracy	• $\pm 1\%$ ( $\pm 5\%$ for triple auxiliaries)
Start Up Time	• 30 ms typical
Ripple & Noise	• 100 mV or 1% pk-pk, whichever is greater single & dual output models, 50/75 mV pk-pk main/auxiliary outputs of triple output models, 20 MHz bandwidth (see note 3)
Transient Response	• 3% max deviation, recovery to within 1% in $< 250 \mu$ s for a 25% load change
Temp. Coefficient	• 0.02%/°C
Overvoltage Protection	• 3.3 V models: 3.9 V typical 5 V models: 6.2 V typical 12 V models: 15 V typical 15 V models: 18 V typical $\pm 5$ V models: $\pm 6.2$ V typical $\pm 12$ V models: $\pm 15$ V typical $\pm 15$ V models: $\pm 18$ V typical
Overload Protection	• $> 150\%$ off ull load
Short Circuit Protection	• Trip & restart (hiccup mode), auto recovery
Overtemperature Protection	• 115 °C typical
Remote On/Off	• On = Logic High ( $> 3.0$ ) or Open Off = Logic Low ( $< 1.2$ V) or short pin 2 to 3
Maximum Capacitive Load	• See table

## Features

- 4:1 Input Range
- High Power Density
- Single, Dual and Triple Outputs
- High Efficiency - Up to 91%
- Remote On/Off
- 1600 VDC Isolation
- 3 Year Warranty

## General

Efficiency	• See table
Isolation Voltage	• 1600 VDC Input to Output 1600 VDC Input to Case 1600 VDC Output to Case
Switching Frequency	• 330 kHz typical
Power Density	• 37.5 W/in <sup>3</sup>
MTBF	• 320 kHrs min to MIL-HDBK-217F at 25 °C, GB

## Environmental

Operating Temperature	• -40 °C to +75 °C, see derating curve
Case Temperature	• +105 °C max
Cooling	• Convection-cooled
Operating Humidity	• 5-95% RH, non-condensing
Storage Temperature	• -40 °C to +125 °C

## EMC

Emissions	• EN55022, class A conducted & radiated with external components, see application note
ESD Immunity	• EN61000-4-2, level 3, Perf Criteria A
Radiated Immunity	• EN61000-4-3 10 V/m Perf Criteria A*
EFT/Burst	• EN61000-4-4 level 3, Perf Criteria A*
Surge	• EN61000-4-5 installation class 2, Perf Criteria A
Conducted Immunity	• EN61000-4-6 10 V/rms, Perf Criteria A
Magnetic Field	• EN61000-4-8 1 A/m, Perf Criteria A

\*External input capacitor required 220  $\mu$ F/250 V


## Models and Ratings

Input Voltage	Output Voltage	Output Current	Input Current <sup>(1)</sup>		Maximum Capacitive Load	Efficiency	Model Number
			No Load	Full Load			
9-36 VDC	3.3 V	7.50 A	60 mA	1185 mA	20000 $\mu$ F	89%	JTL3024S3V3†^A
	5.0 V	6.00 A	100 mA	1420 mA	14000 $\mu$ F	91%	JTL3024S05†^A
	12.0 V	2.50 A	30 mA	1436 mA	2000 $\mu$ F	90%	JTL3024S12†^A
	15.0 V	2.00 A	30 mA	1420 mA	2000 $\mu$ F	91%	JTL3024S15†^A
	$\pm 5.0$ V	$\pm 3.00$ A	120 mA	1437 mA	$\pm 3000$ $\mu$ F	90%	JTL3024D05†^A
	$\pm 12.0$ V	$\pm 1.25$ A	30 mA	1453 mA	$\pm 1300$ $\mu$ F	89%	JTL3024D12†^A
	$\pm 15.0$ V	$\pm 1.00$ A	40 mA	1437 mA	$\pm 1300$ $\mu$ F	89%	JTL3024D15†^A
	+3.3 V, $\pm 12.0$ V	5.00 A, $\pm 0.42$ A	80 mA	1287 mA	15000, $\pm 220$ $\mu$ F	89%	JTL3024T0312†^A
	+3.3 V, $\pm 15.0$ V	5.00 A, $\pm 0.33$ A	90 mA	1279 mA	15000, $\pm 220$ $\mu$ F	89%	JTL3024T0315†^A
	+5.0 V, $\pm 12.0$ V	4.00 A, $\pm 0.42$ A	100 mA	1440 mA	8000, $\pm 220$ $\mu$ F	89%	JTL3024T0512†^A
+5.0 V, $\pm 15.0$ V	4.00 A, $\pm 0.33$ A	110 mA	1431 mA	8000, $\pm 220$ $\mu$ F	90%	JTL3024T0515†^A	
18-75 VDC	3.3 V	7.50 A	50 mA	593 mA	20000 $\mu$ F	89%	JTL3048S3V3†^A
	5.0 V	6.00 A	60 mA	702 mA	14000 $\mu$ F	91%	JTL3048S05†^A
	12.0 V	2.50 A	30 mA	718 mA	2000 $\mu$ F	90%	JTL3048S12†^A
	15.0 V	2.00 A	30 mA	710 mA	2000 $\mu$ F	90%	JTL3048S15†^A
	$\pm 5.0$ V	$\pm 3.00$ A	70 mA	710 mA	$\pm 3000$ $\mu$ F	91%	JTL3048D05†^A
	$\pm 12.0$ V	$\pm 1.25$ A	30 mA	718 mA	$\pm 1300$ $\mu$ F	90%	JTL3048D12†^A
	$\pm 15.0$ V	$\pm 1.00$ A	40 mA	718 mA	$\pm 1300$ $\mu$ F	90%	JTL3048D15†^A
	+3.3 V, $\pm 12.0$ V	5.00 A, $\pm 0.42$ A	50 mA	663 mA	15000, $\pm 220$ $\mu$ F	89%	JTL3048T0312†^A
	+3.3 V, $\pm 15.0$ V	5.00 A, $\pm 0.33$ A	50 mA	640 mA	15000, $\pm 220$ $\mu$ F	89%	JTL3048T0315†^A
	+5.0 V, $\pm 12.0$ V	4.00 A, $\pm 0.42$ A	60 mA	712 mA	8000, $\pm 220$ $\mu$ F	91%	JTL3048T0512†^A
+5.0 V, $\pm 15.0$ V	4.00 A, $\pm 0.33$ A	50 mA	707 mA	8000, $\pm 220$ $\mu$ F	90%	JTL3048T0515†^A	

### Notes

- Input current specified at nominal 24 V or 48 V input.
- Cross regulation for duals is  $\pm 5\%$  when one output is at 100% and the other is varied between 25% and 100%. Cross regulation for triples is  $\pm 5\%$  when main output and one auxiliary is at 25% and the other is varied between 25% and 100%.
- Measured with 1  $\mu$ F ceramic capacitor across output rails.

## Mechanical Details

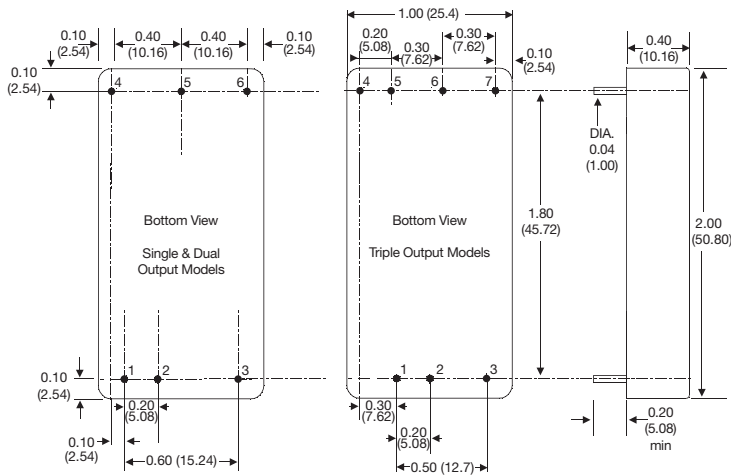


PIN CONNECTIONS			
Pin	Single	Dual	Triple
1	+Vin	+Vin	+Vin
2	-Vin	-Vin	-Vin
3	Remote On/Off	Remote On/Off	Remote On/Off
4	+Vout	+Vout	+Vout 2
5	-Vout	Com	-Vout 3
6	Trim	-Vout	Com
7			+Vout 1

### Notes


- All dimensions are in inches (mm).
- Weight: 0.07 lbs (30 g) approx
- Pin diameter: 0.04  $\pm 0.002$  (1.0  $\pm 0.05$ )
- Pin pitch tolerance:  $\pm 0.014$  ( $\pm 0.35$ )
- Case tolerance:  $\pm 0.02$  ( $\pm 0.5$ )

## Application Notes

### Derating Curve

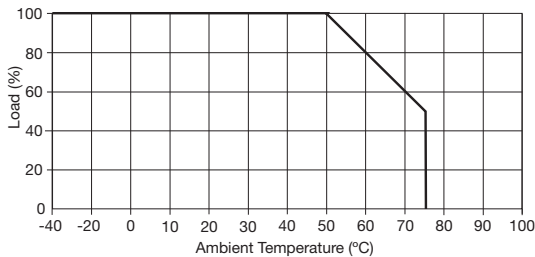

### Input Filter

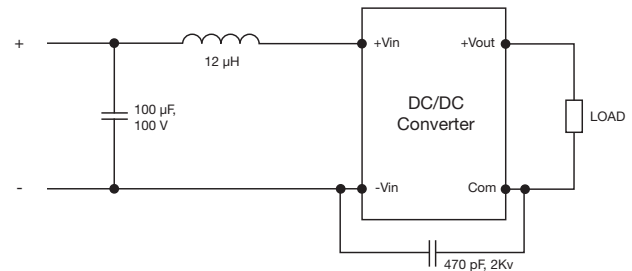

### External Output Trim

