

RWY200 SERIES

Rail DC/ DC Converters Single Output: 200 Watts



Features

- Designed to rail standards EN50155 & EN50121
- Fully potted with thermally conductive MIL-Spec silicon rubber compound.
- Rugged design for on-board train applications
- Wide input voltage range
- Convection / Conduction cooled: No fans
- Fully isolated input – output 3000VDC
- Over voltage protection
- Overload and short circuit protection
- MTBF > 150,000hrs
- Specials input / output combinations on request.

General Specifications

Input Voltage	24VDC (14.4 ~ 34)	36VDC (22 ~ 51)
	48VDC (28 ~ 67)	72VDC (43 ~ 101)
	96VDC (58 ~ 135)	110VDC (66 ~ 154)
	• Other voltages on request	
Input Protection	Reverse polarity protection. Inrush current limiting Lower voltage than specified will not damage unit	
Isolation	Input - Output 3000vdc Input – Chassis 1500vdc Output – Chassis 1500vdc	
Efficiency	Model dependent , typically 80-90%	
Output voltage	See tables	
Output Power	200 watts	
Voltage Adjust.	Fixed output	
Immunity	EN50155 & EN50121-3-2 EN61000-4-2 ESD EN61000-4-3 RF Immunity EN61000-4-4 Fast Transients EN50155 Surge & Voltage variations EN61000-4-6 Conducted Immunity	
EMI	EN5022 Class B Conducted & Radiated	
Switching Freq.	80kHz ±5kHz	
Regulation	±1% Line / Load combined	
Dynamic Response	Max ±5% diviation for 10% - 50% load step with 1msec recovery	
Ripple & Noise	Typically 1% pk-pk or 0.2% RMS of output voltage (20MHZ BW)	
Overload Protection	Rectanular current limiting, with hiccup type short-circuit protection	
Overvoltage Protection	Second regulator loop, independent of main regulator loop	
Operating Temp.	-40°C to +70°C cold plate temperature	
Cooling	Conduction cooling via base plate to customer chassis or heatsink	
Environmental Protection	Full encapsulation with thermally conductive silicon potting with UL94V-0 rated	
Shock & Vibration	IEC61373 Cat 1 A & B and Cat 2	
Humidity	5-95% non-condensing, higher ration option	
MTBF	>150,000 hrs	

Description

The **RWY200** series dc/dc converters are designed for use on Rail Rolling Stock and for many extremely harsh environments.

They are fully potted with a thermally conductive MIL-Spec silicon compound, meeting a high level of shock and vibration.

The table below illustrate the most common output voltages, but can also be manufactured to special input & output specifications with total flexibility to match customer requirements.


Model	Output		Power W
	V	A	
RWY200	5V	20A	100W
	12V	16A	200W
	24V	8A	
	Other outputs upon request		

- Final part numbers will be factory allocated to reflect customer input & output requirements.




LED / Indicator	Optional on some models
Alarm output	Optional on some models
Connector	5 pole barrier-type terminal block with 3/8"spacing. (optional cover)
Dimensions	69 x 58 x 210mm (P200) W x H x L (includes terminal block & mounting flanges)
Weight	1.0kg

RWY200 SERIES

Rail DC/ DC Converters Single Output: 200 Watts



Ø.213 4 PLCS.

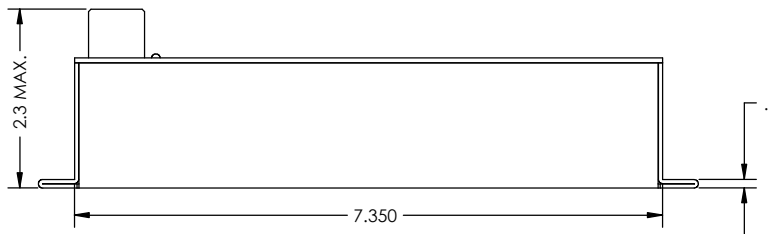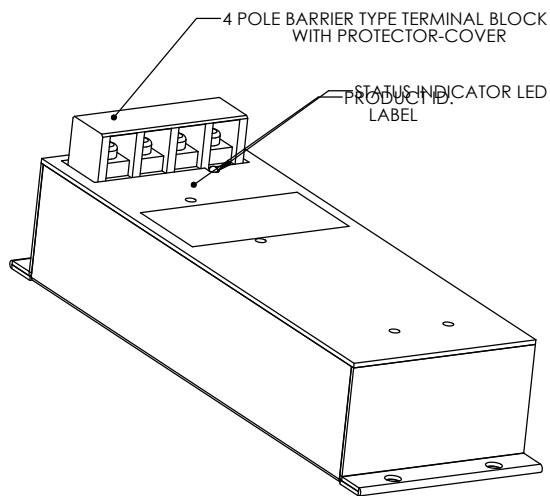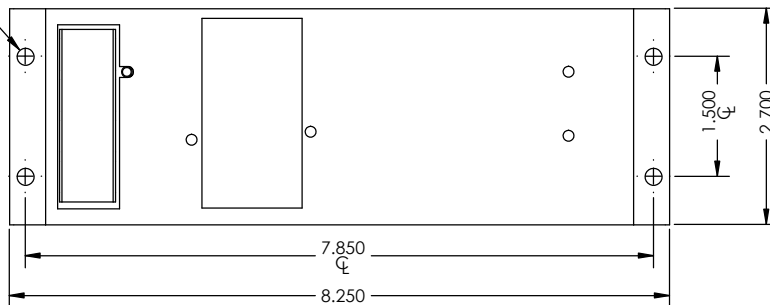

DIMENSIONS ARE IN INCHES
 TOLERANCES ON
 DECIMALS: XXX ± 0.008"
 XX ± 0.012"
 ANGLES: ± 2°
 FRACTIONS: ± 1/64"
 UNLESS OTHERWISE STATED
 EDGES & HOLES DEBURRED
 SURFACES FREE OF SCRATCHES

CASE MATERIAL: ALUMINUM
 FINISH: CLEAR IRIDATED
 THE UNIT IS FULLY POTTED WITH SILICONE COMPOSITE POTTING COMPOUND

THIS DOCUMENT IS THE PROPERTY OF ABSOPULSE ELECTRONICS LTD. ITS CONTENTS ARE PROPRIETARY AND MAY NEITHER BE COPIED, REPRODUCED NOR ITS CONTENTS DISCLOSED TO OTHERS WITHOUT PRIOR WRITTEN AGREEMENT FROM ABSOPULSE ELECTRONICS LTD.

Title:			
Part of:	OUTLINE DRAWING P200 Package	Date:	
	FEB.10.05		