

RWY280H SERIES

Rail DC/ DC Converters Single Output: 280 Watts



Features

- ◆ Designed to rail standards EN50155 & EN50121
- ◆ Fully potted with thermally conductive MIL-Spec silicon rubber compound.
- ◆ Rugged design for on-board train applications
- ◆ Wide input voltage range
- ◆ Convection / Conduction cooled: No fans
- ◆ Fully isolated input – output 3000VDC
- ◆ Over voltage protection
- ◆ Overload and short circuit protection
- ◆ MTBF > 160,000hrs
- ◆ Specials input / output combinations on request.

General Specifications

Input Voltage	24VDC (14.4 ~ 34)	36VDC (22 ~ 51)
	48VDC (29 ~ 67)	72VDC (43 ~ 101)
	96VDC (58 ~ 135)	110VDC (66 ~ 154)
	◆ Other voltages on request	
Input Protection	Reverse polarity protection. Inrush current limiting Lower voltage than specified will not damage unit	
Isolation	Input - Output 3000vdc Input – Chassis 1500vdc Output – Chassis 1500vdc	
Efficiency	Model dependent , typically 80-90%	
Output voltage	See tables	
Output Power	280 watts	
Voltage Adjust.	Fixed output	
Immunity	EN50155 & EN50121-3-2 EN61000-4-2 ESD EN61000-4-3 RF Immunity EN61000-4-4 Fast Transients EN50155 Surge & Voltage variations EN61000-4-6 Conducted Immunity	
EMI	EN5022 Class B Conducted & Radiated	
Switching Freq.	80kHz ±5kHz	
Regulation	±1% Line / Load combined	
Dynamic Response	Max ±5% diviation for 10% - 50% load step wuth 1msec recovery	
Ripple & Noise	Typically 1% pk-pk or 0.2% RMS of output voltage (20MHZ BW)	
Overload Protection	Rectanular current limiting, with hiccup type short-circuit protection	
Overvoltage Protection	Second regulator loop, independent of main regular loop.	
Operating Temp.	-40°C to +70°C cold plate temperature	
Cooling	Conduction cooling via base plate to customer chassis or heatsink	
Environmental Protection	Full encapsulation with thermally conductive silicon potting with UL94V-0 rated	
Shock & Vibration	IEC61373 Cat 1 A & B and Cat 2	
Humidity	5-95% non-condensing, higher ration option	
MTBF	>160,000 hrs	

Description

The **RWY280H** series dc/dc converters are designed for use on Rail Rolling Stock and for many extremely harsh environments.

They are fully potted with a thermally conductive MIL-Spec silicon compound, meeting a high level of shock and vibration.



The table below illustrate the most common output voltages, but can also be manufactured to special input & output specifications with total flexibility to match customer requirements.

Model	Output		Power W
	V	A	
RWY280H	12V ~ 96V	20A	280W


1. Any output voltage from 12 ~ 96V is possible, but maximum output current and power can't exceed 20A / 280W.
2. Maximum output power will depend on final customer selection of input / output voltage combination.
3. Final part no will be factory assigned :

◆ e.g. **RWY280H-110/24PT- xxxxx**

LED / Indicator	Optional on some models
Alarm output	Optional on some models
Connector	9 pole barrier-type terminal block with 3/8" spacing. (optional cover)
Dimensions	113 x 60 x 200mm (P300H) W x H x L (includes terminal block & mounting flanges)
Weight	1.8kg

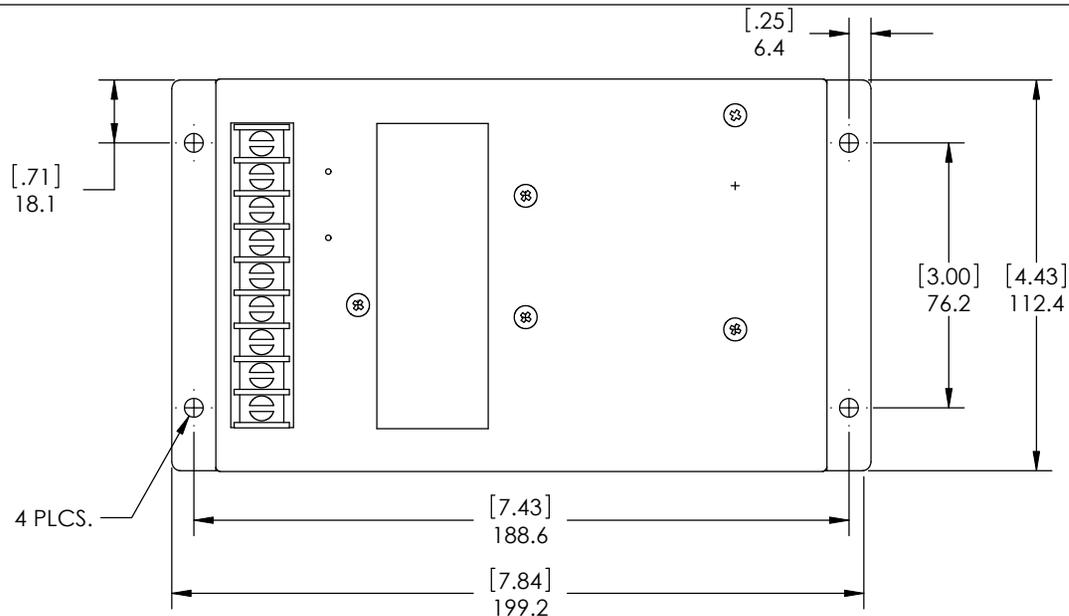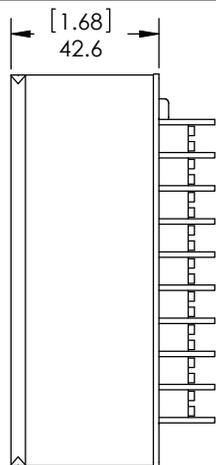


Ø 5.4 MTG. HOLES 4 PLCS.

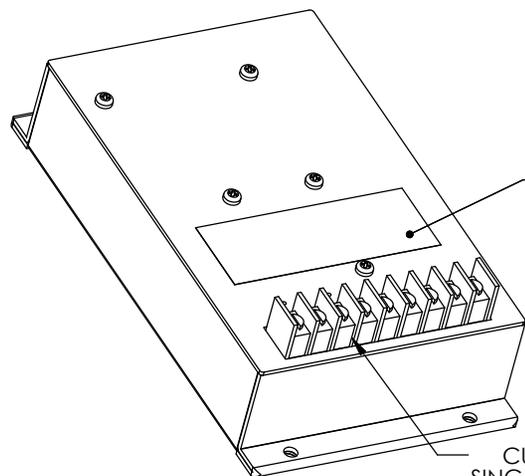

PRODUCT ID. & TERMINALS / LOGO LABEL

CURTIS 38000 SERIES 9 POLE SINGLE ROW BARRIER TYPE TERMINAL

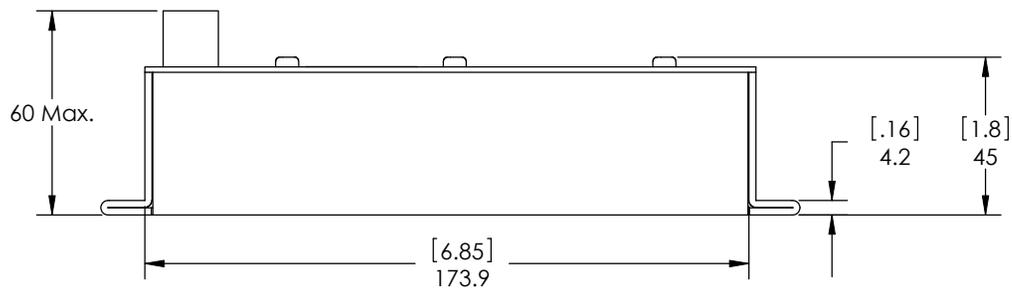

CASE MATERIAL: ALUMINUM
 FINISH: CLEAR IRIDITE AS PER MIL-C-554E CLASS 3
 THE UNIT IS POTTED WITH SILICONE COMPOSITE POTTING COMPOUND

DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ON
 DECIMALS: XXX ± 0.2mm
 XX ± 0.3mm
 ANGLES: ± 2°
 FRACTIONS: ± 0.4mm
 UNLESS OTHERWISE STATED



Title:	OUTLINE DRAWING
Part of:	P300H Nov 2010
www.heliosps.com	