

# CSI150-FT SERIES

DC / AC Sine Wave Inverters: 150 VA



## General Specifications

<b>Input Voltage</b>	24VDC, 36VDC, 48VDC, 125VDC
<b>Input Range</b>	±15% of input, other options on request
<b>Input Protection</b>	Inrush current limiting Internal safety fuse, Reverse Polarity Protection
<b>Isolation</b>	For input > 60vdc : Input – Output: 2250vdc For input <60vdc: Input – Output: 1500vdc • Other options on request
<b>EMI</b>	EN55011 Class A conducted
<b>Immunity</b>	EN 61000-4
<b>Output voltage</b>	115VAC / 230VAC options Isolated / Floating output Neutral can be connected to earth terminal if required.
<b>Output Waveform</b>	Sinusoidal
<b>Harmonic Distortion</b>	Less than 5% at 100% load.
<b>Output Freq.</b>	50Hz, 60Hz, 400Hz options
<b>Load Crest Factor</b>	Maximum 3% at 90% load
<b>Output Power</b>	150VA
<b>Regulation</b>	Load: ±2% from 10% to 100% load step. Line: ±1.0% over input range
<b>Output Noise</b>	High Frequency ripple is better than 500mVrms ( 20MHz BW )
<b>Protection</b>	Current limiting with short circuit protection Self re-setting thermostat for thermal protection
<b>Output Over Voltage Protection</b>	Output voltage is limited by internal supply voltage
<b>Efficiency</b>	Input voltage / model dependent typically 80% at 100% load
<b>Operating Temp</b>	0°C to +50°C at rated load. Other options on request
<b>Cooling</b>	Convection / Conduction cooled
<b>Shock &amp; Vibration</b>	Designed to meet IEC61373 Cat 1 A & B
<b>Humidity</b>	5-95% non-condensing
<b>MTBF</b>	>130,000 hrs at 45°C
<b>LED Indicator</b>	Optional
<b>Connector</b>	Terminal block, other options on request
<b>Dimensions</b>	114 x 58 x 256mm ( F2 )
<b>Weight</b>	1.2kg

## Features

- Sinusoidal output waveform
- 150VA output power
- Convection cooled – No Fans
- Frequency options 50Hz / 60Hz / 400Hz
- Wide range of input options: 24 ~ 125VDC
- Optional output fail alarm on some models
- Low profile 57mm
- Rugged design for harsh environments
- Full electronic protection
- Non standard input voltage options
- **RSI Series ( Rail Spec ) - Option**

## Description

The **CSI150** is rugged DC/AC inverter uses field proven, microprocessor controlled high frequency PWM technology to generate 150VA output power with pure sine wave output voltage.

It is a mature design with a track record in numerous applications. The DC/DC input stage boosts the input voltage to a higher DC voltage, which feeds the DC/AC inverter to generate the required AC output.

The use of high frequency conversion enables a compact construction, low weight and high efficiency. The unit has full electronic protection. The input and output are filtered for low noise. Cooling is via baseplate to a heatsinking surface and by natural convection.

## Options ( may not be available on all combinations )

<b>Alarms</b>	Output Fail Alarm: voltage free relay contacts
<b>Remote Inhibit</b>	Remote ON / OFF
<b>Ruggedized</b>	Conformal coating and Ruggedization for use in harsh environments.
<b>Slow Start</b>	Slow start up option for powering fans
<b>Connector</b>	A variety of terminals / connectors available to suit special customer requirements
<b>Rack Mount</b>	2U x 19in Rack Mount

## Model No Example:


**CSI150-4E-FT** ( 48VDC / 230VAC 50Hz )

CSI	Power	Input Vdc	Output	FT
CSI	150	2 = 24V	A = 115V/60Hz	Std Package
		3 = 36V		
		4 = 48V	E = 230V/50Hz	
		7 = 72V	M = 115V/400Hz	
		9 = 96V		
		108 = 108V		
		5 = 125V		

1. Standard input / Output combinations are illustrated.
2. Non standard combinations are available on request
3. Final Part no will be allocated at time of order to reflect customer specifications and options.

# CSI150-FT SERIES

DC / AC Sine Wave Inverters: 150 VA

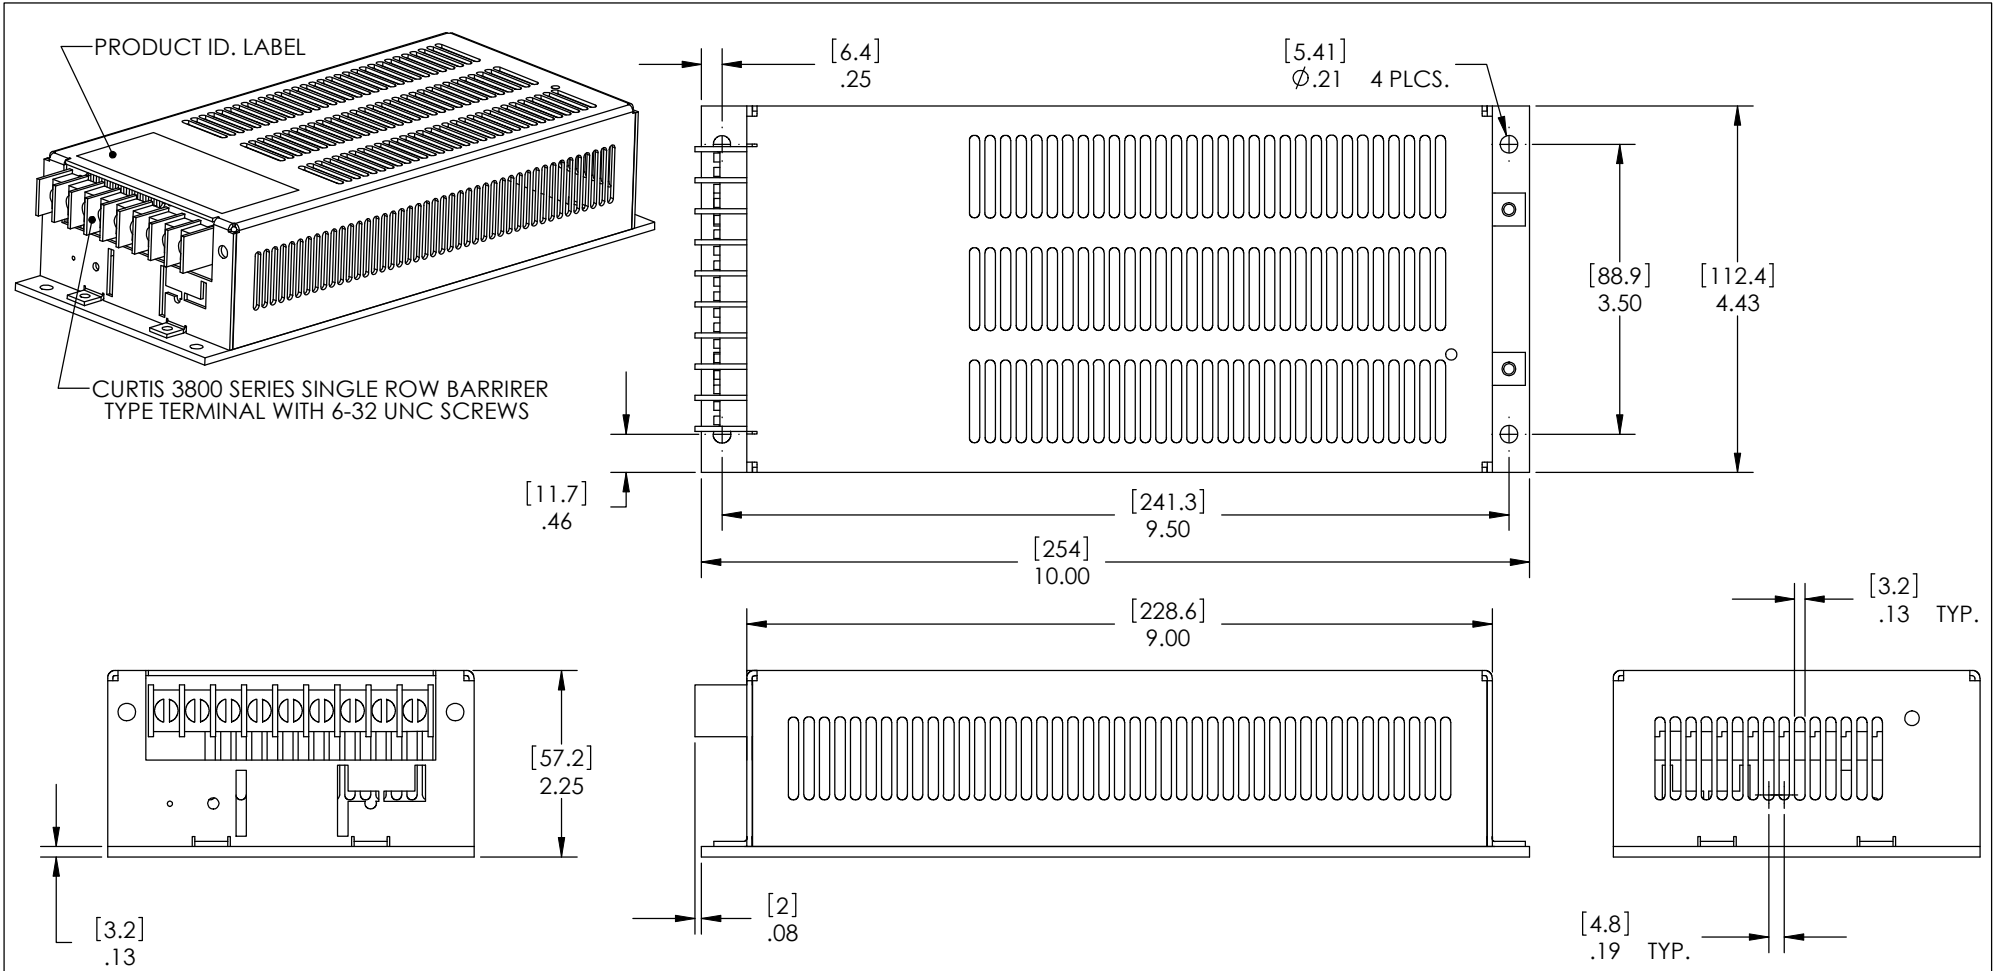

DIMENSIONS ARE IN INCHES  
(mm) TOLERANCES ON  
DECIMALS: XXX ± 0.008"  
              XX ± 0.012"  
ANGLES: ± 2°  
FRACTIONS: ± 1/64"  
UNLESS OTHERWISE STATED

THIS DOCUMENT IS THE PROPERTY  
OF AMTEX ELECTRONICS LTD.  
ITS CONTENTS ARE PROPRIETARY AND  
MAY NEITHER BE COPIED, REPRODUCED  
NOR ITS CONTENTS DISCLOSED TO OTHERS  
WITHOUT PRIOR WRITTEN AGREEMENT  
FROM AMTEX ELECTRONICS LTD.

Title: OUTLINE DRAWING

Part of: F2 PACKAGE